EASI FILE CORP. IRVINE, CA EFH 24
RS Book 3 Pg. 49 J
# 34-67

# RECORD OF SURVEY

## NO. 34 - 67

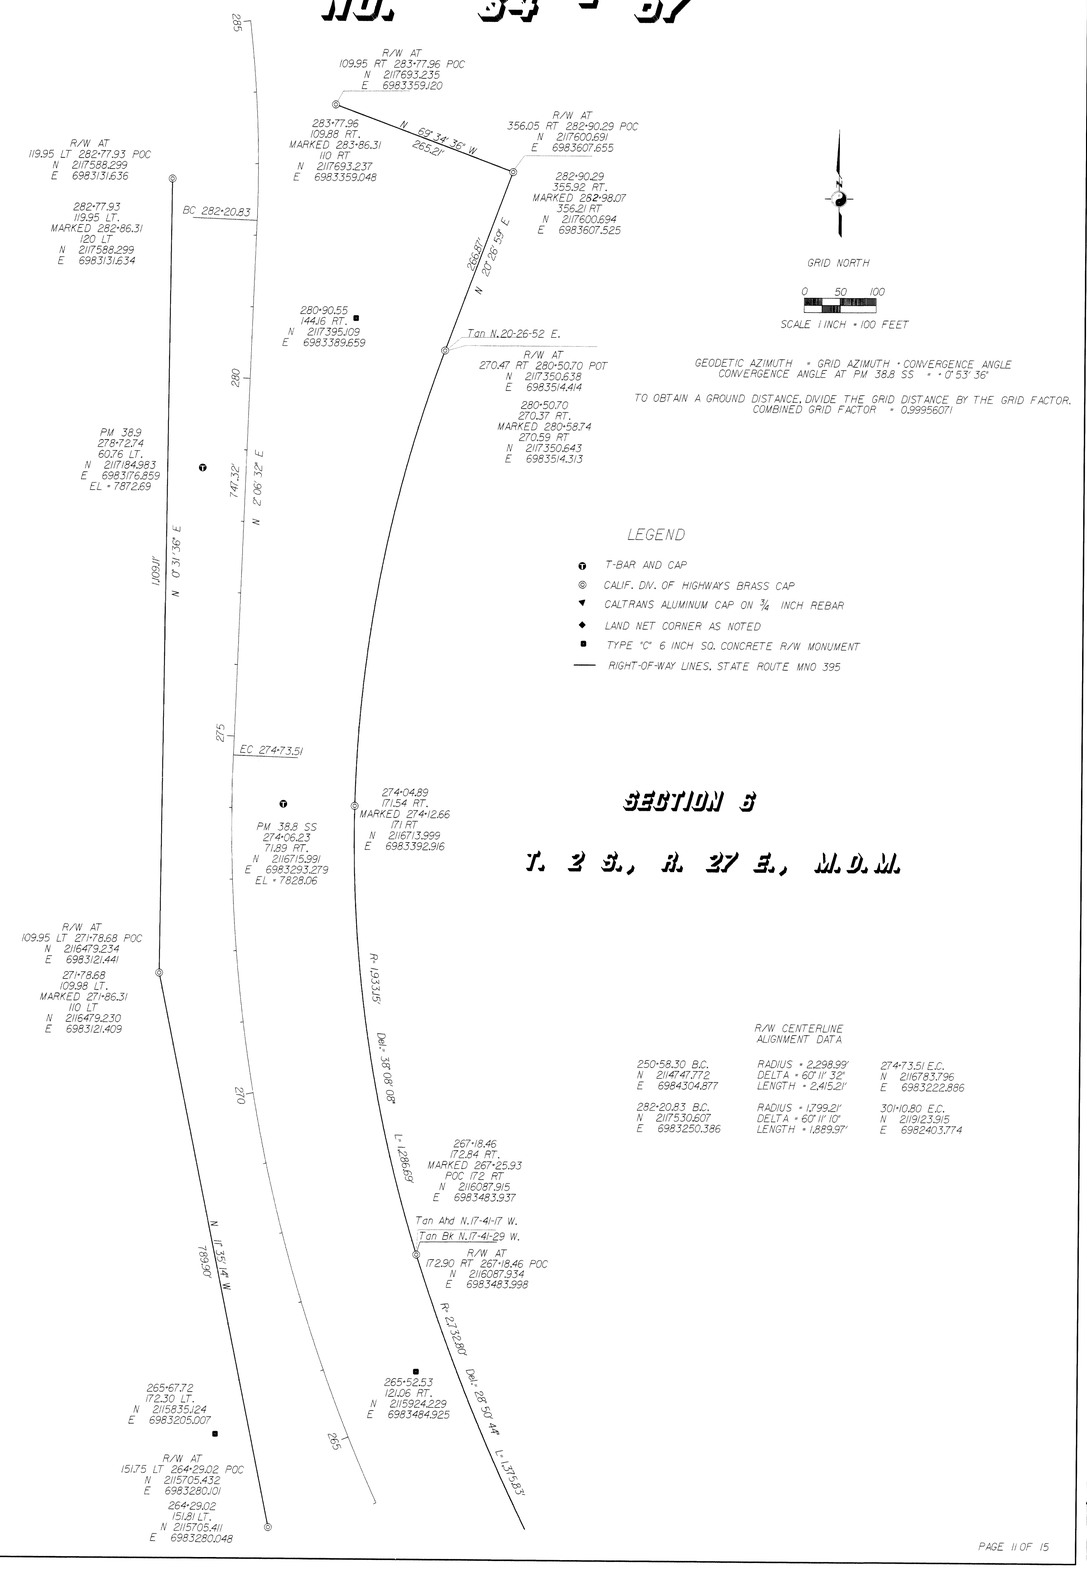


GEODETIC AZIMUTH = GRID AZIMUTH + CONVERGENCE ANGLE
CONVERGENCE ANGLE AT PM 38.8 SS = + 0° 53' 36"

TO OBTAIN A GROUND DISTANCE, DIVIDE THE GRID DISTANCE BY THE GRID FACTOR.
COMBINED GRID FACTOR = 0.9995607

### LEGEND

- T-BAR AND CAP
- CALIF. DIV. OF HIGHWAY'S BRASS CAP
- CALTRANS ALUMINUM CAP ON 3/4 INCH REBAR
- LAND NET CORNER AS NOTED
- TYPE "C" 6 INCH SQ. CONCRETE R/W MONUMENT
- RIGHT-OF-WAY LINES, STATE ROUTE MNO 395

## SECTION 5

## T. 2 S., R. 27 E., M.D.M.

R/W CENTERLINE ALIGNMENT DATA

| | | |
|---|---|---|
| 250+58.30 B.C.<br>N 2114747.772<br>E 6984304.877 | RADIUS = 2,298.99'<br>DELTA = 60° 11' 32"<br>LENGTH = 2,415.21' | 274+73.51 E.C.<br>N 2116783.796<br>E 6983222.886 |
| 282+20.83 B.C.<br>N 2117530.607<br>E 6983250.386 | RADIUS = 1,799.21'<br>DELTA = 60° 11' 10"<br>LENGTH = 1,889.97' | 301+10.80 E.C.<br>N 2119123.915<br>E 6982403.774 |



BOOK 3 OF RECORD OF SURVEY MAPS AT PAGE 49-J