RECORD OF SURVEY

34 - 76

R/W CENTERLINE & SOUTHBOUND CENTERLINE SOUTH OF STA.1240+30

1135+37.818 P.O.T.	1226+15.823 B.C.	Δ = 25° 53' 36"
N 651724.346	N 660676.313	R = 1218.729
E 2124432.785	E 2122925.312	L = 550.771

NORTHBOUND PROFILE GRADE N.B.P.G.

163+42.796 E.C.	176+71.433 P.J.	225+88.988 B.C.
N 654530.809	N 655840.999	N 660686.916
E 2124014.543	E 2123793.913	E 2122957.590

T. 1 N.

R. 26 E.

M.D.M.

SEC. 22

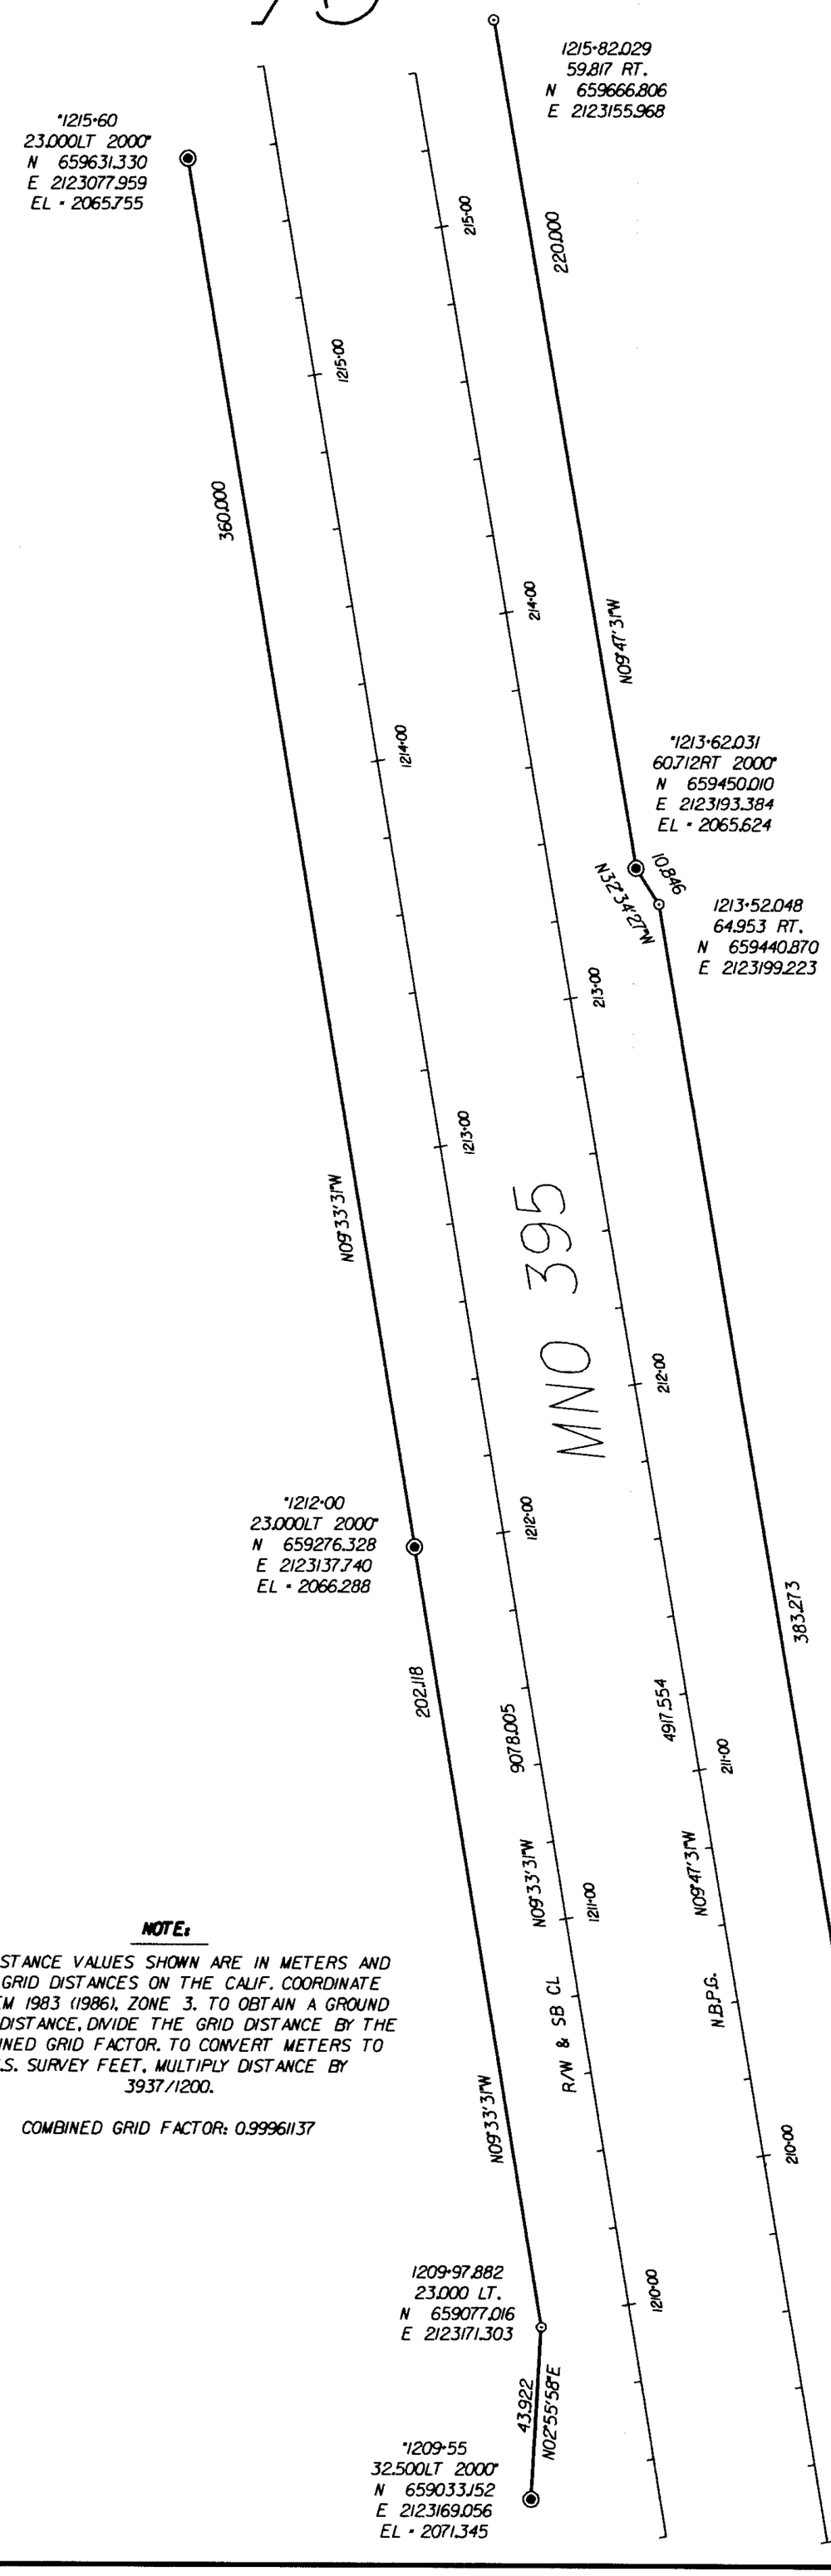

GRID NORTH
GEODETIC AZ. = GRID AZ. + CONVERGENCE
CONVERGENCE AT 1212+00 23.000 LT. = + 0° 51' 27"

SCALE
1:1200

METERS

0 50 100 150

LEGEND

- ◆ FOUND LAND NET CORNER, AS NOTED
- ● FOUND MONUMENT, AS NOTED
- ◀ PROJECT CONTROL MONUMENT, 3/4 INCH REBAR WITH CALTRANS ALUMINUM CAP, MARKED AS SHOWN
- ◉ SET R/W MONUMENT, 3/4 INCH REBAR WITH CALTRANS ALUMINUM CAP, MARKED AS SHOWN
- ⊙ CALCULATED POINT, NOTHING SET.
- ■ SIX INCH SQUARE, CONCRETE, TYPE "C" RIGHT-OF-WAY MONUMENT.
- —— RIGHT-OF-WAY PER CALTRANS RIGHT-OF-WAY RECORD MAPS.
- ◉ N.G.S. MONUMENT, AS NOTED.
- ◉ BENCH MARK, AS NOTED.

0 50 100

SCALE 1 INCH = 100 FEET

NOTE:

ALL DISTANCE VALUES SHOWN ARE IN METERS AND ARE GRID DISTANCES ON THE CALIF. COORDINATE SYSTEM 1983 (1986), ZONE 3. TO OBTAIN A GROUND LEVEL DISTANCE, DIVIDE THE GRID DISTANCE BY THE COMBINED GRID FACTOR. TO CONVERT METERS TO U.S. SURVEY FEET, MULTIPLY DISTANCE BY 3937/1200.

COMBINED GRID FACTOR: 0.99961137