RECORD OF SURVEY 34 - 76

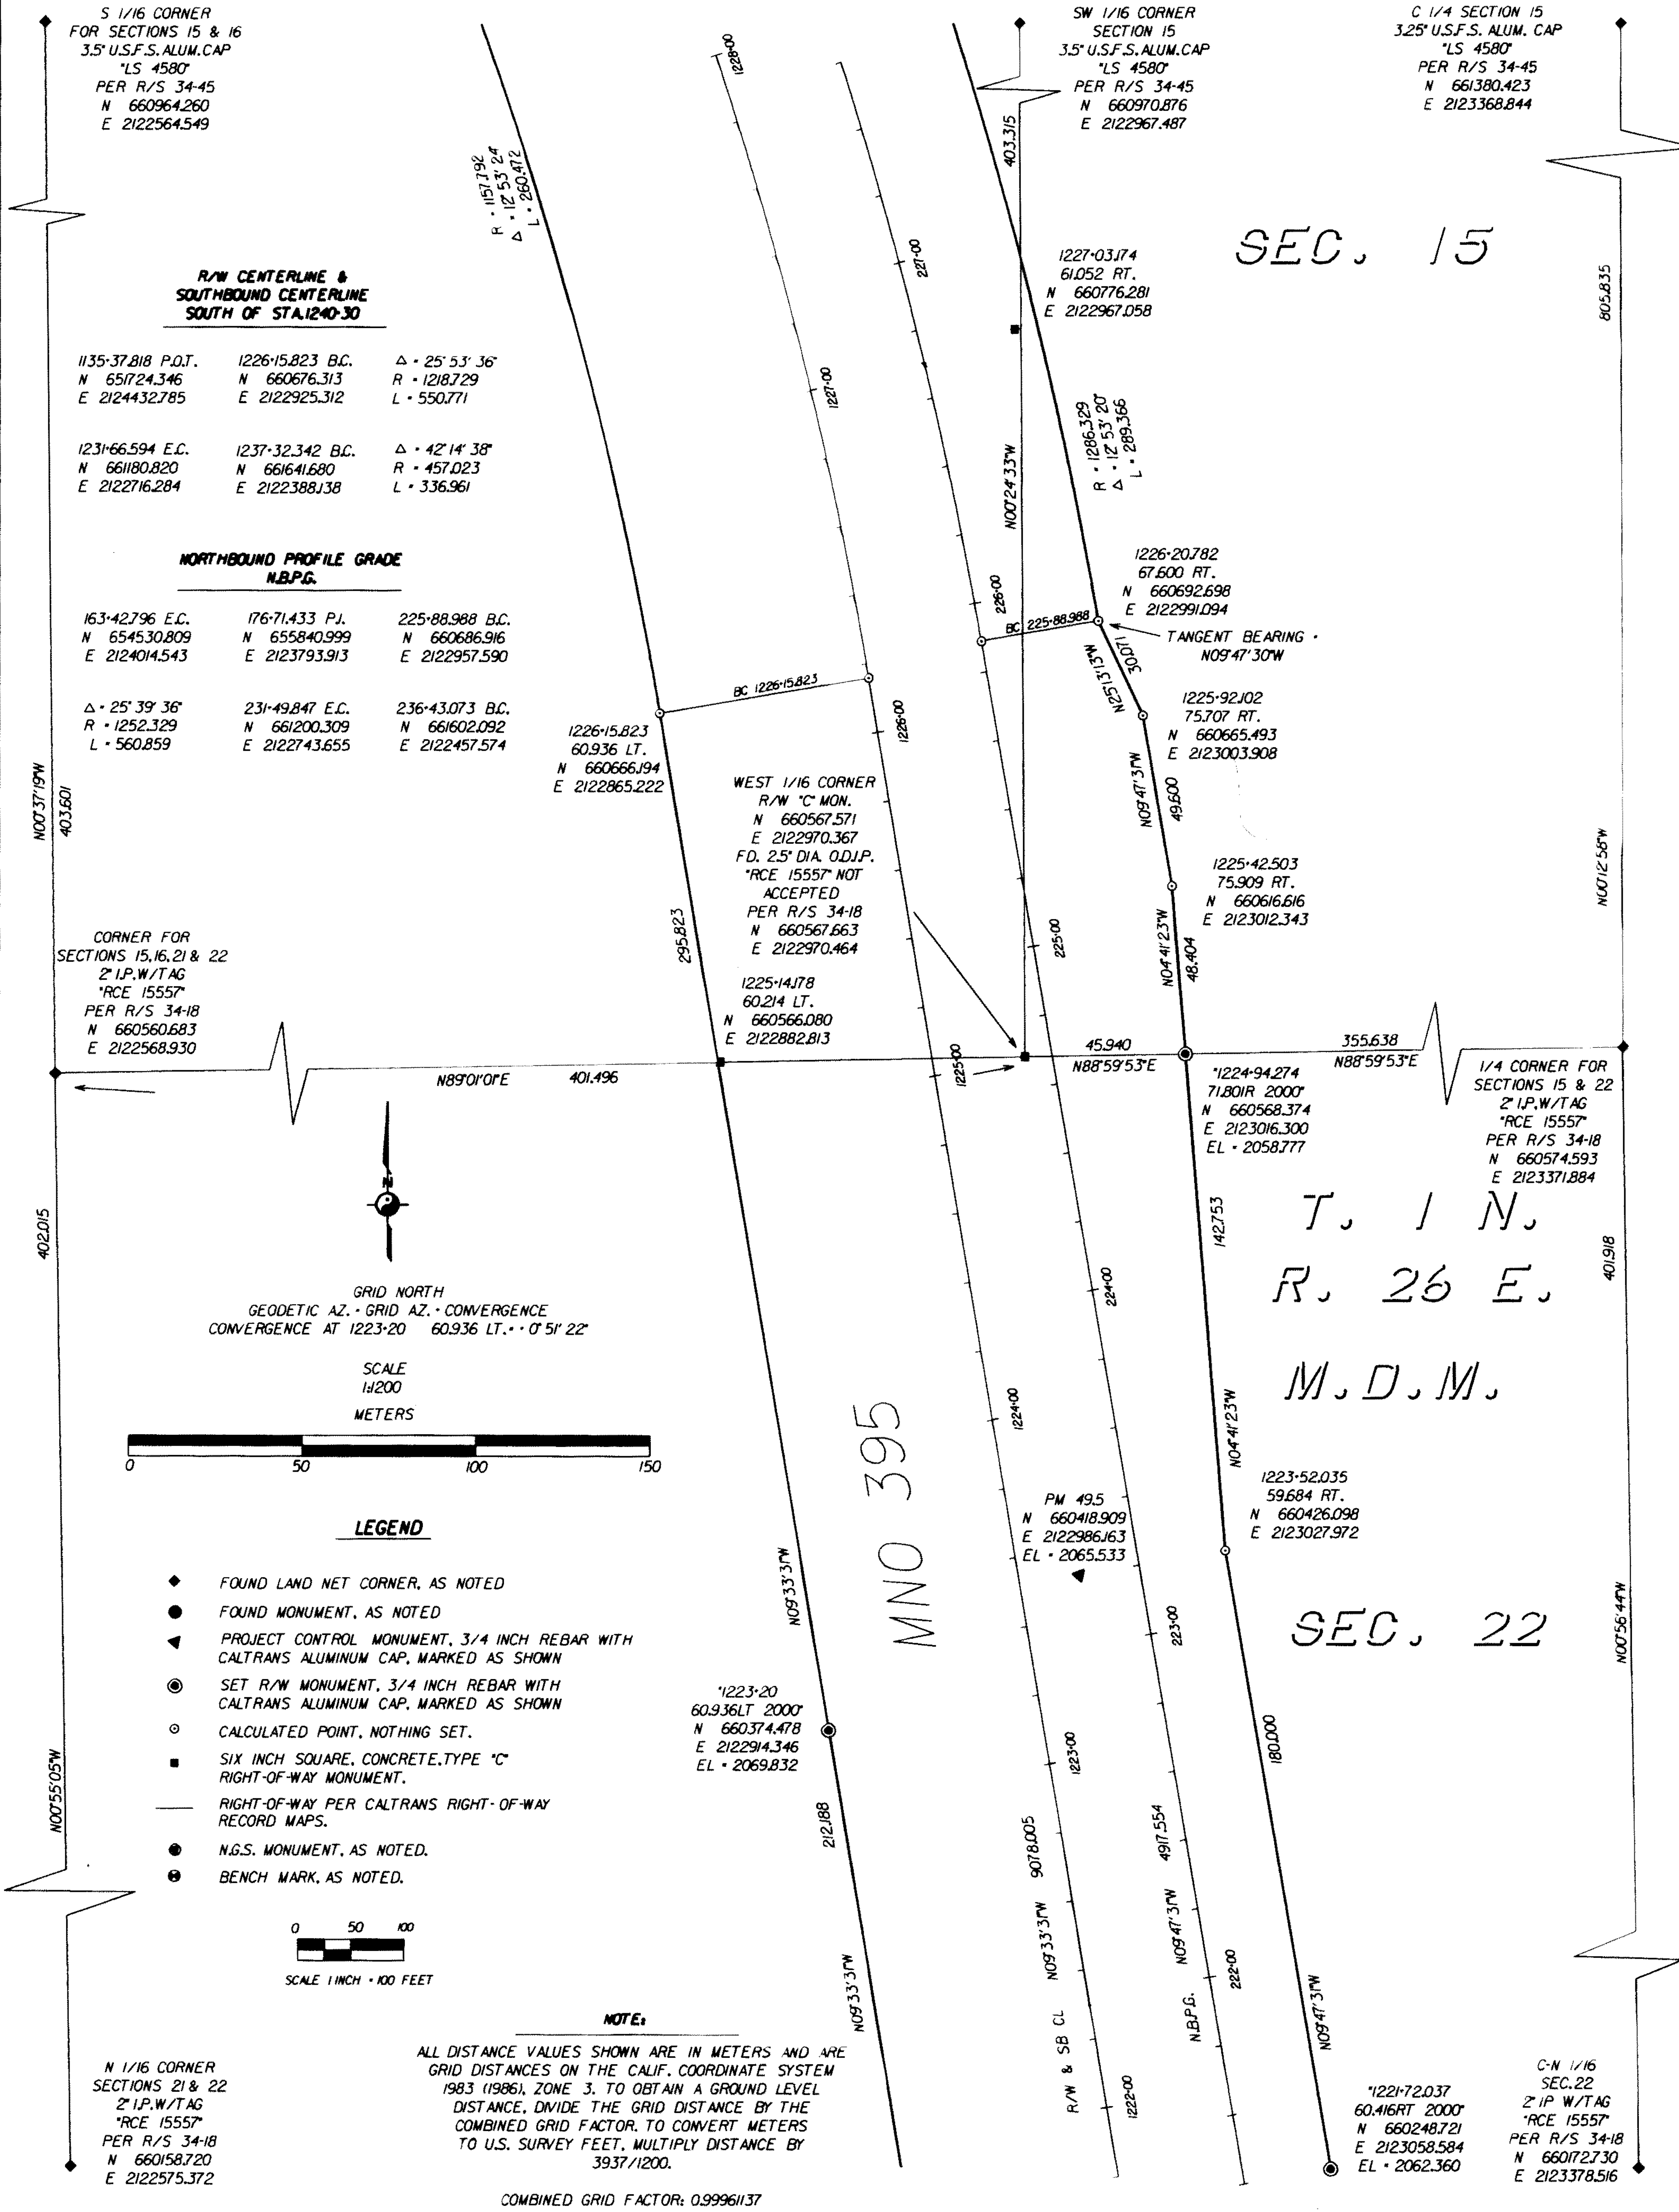

LEGEND

- ◆ FOUND LAND NET CORNER, AS NOTED
- ● FOUND MONUMENT, AS NOTED
- ◀ PROJECT CONTROL MONUMENT, 3/4 INCH REBAR WITH CALTRANS ALUMINUM CAP, MARKED AS SHOWN
- ◉ SET R/W MONUMENT, 3/4 INCH REBAR WITH CALTRANS ALUMINUM CAP, MARKED AS SHOWN
- ⊙ CALCULATED POINT, NOTHING SET.
- ■ SIX INCH SQUARE, CONCRETE, TYPE "C" RIGHT-OF-WAY MONUMENT.
- —— RIGHT-OF-WAY PER CALTRANS RIGHT-OF-WAY RECORD MAPS.
- N.G.S. MONUMENT, AS NOTED.
- BENCH MARK, AS NOTED.

NOTE:

ALL DISTANCE VALUES SHOWN ARE IN METERS AND ARE GRID DISTANCES ON THE CALIF. COORDINATE SYSTEM 1983 (1986), ZONE 3. TO OBTAIN A GROUND LEVEL DISTANCE, DIVIDE THE GRID DISTANCE BY THE COMBINED GRID FACTOR. TO CONVERT METERS TO U.S. SURVEY FEET, MULTIPLY DISTANCE BY 3937/1200.

COMBINED GRID FACTOR: 0.99961137

BOOK 3 OF RECORD OF SURVEY MAPS AT PAGE 91N